



UL030

High output universal LED light

Features

IP Rating	IP68
CSP Switchable	Single CCT
Tilttable	360°
Rotation Angle	360°
Dimmable Option	Driver dependent
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

Inrush Current	N/A
Construction Material	Stainless steel (316), brass, anodised aluminium
Weight	645g
Ambient Temperature Range	50°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
UL030DNBX40	Stainless steel	4.6W	4000K	12°	490	70	7975
UL030DNBX30	Stainless steel	4.6W	3000K	12°	480	69	7812
UL030DNBX27	Stainless steel	4.6W	2700K	12°	470	67	7649
UL030DWBX27	Stainless steel	4.6W	2700K	40°	470	67	1007
UL030DWBX30	Stainless steel	4.6W	3000K	40°	480	69	1029
UL030DWBX40	Stainless steel	4.6W	4000K	40°	490	70	1050
UL030ANAX30	Brass	4.6W	3000K	12°	480	69	7812
UL030ANAX27	Brass	4.6W	2700K	12°	470	67	7649
UL030AWAX30	Brass	4.6W	3000K	40°	480	69	1029
UL030AWAX27	Brass	4.6W	2700K	40°	470	67	1007
UL030BWBX30	Black anodised aluminium	4.6W	3000K	40°	480	69	1029
UL030BWBX27	Black anodised aluminium	4.6W	2700K	40°	470	67	1007

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/700 3-9	220-240V	Yes	No	0	1	4
PSIP70018W	220-240V	Yes	No	0	1	3
PSDIM700	220-240V	N/A	Yes (1-10V)	0	1	11



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years

Features & benefits

4.6W at 700mA

Coastal protected

IP68 ideal for outdoor areas and under water lighting

Single LED and lens combination for maximum efficiency and optimal light distribution

Complete with wall fixings

Tilt & rotate for adjusting light



Antique brass finish, Marine grade stainless steel 316 & Black anodised aluminium

Long lifetime of 70,000hrs

Light source
energy efficiency:



Beam angles: 12° 40°

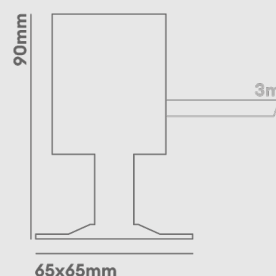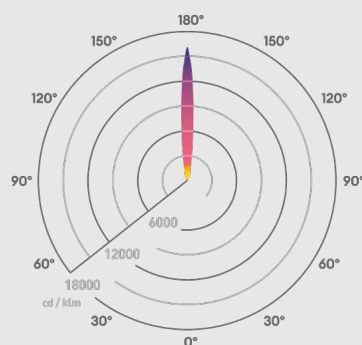

Accessories

JB2 / JB4	Waterproof junction box / Gel filled waterproof connector	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
PLD UNI-DRIVE 700MA	700mA Driver	Sold Separately
PLD UNI-DRIVE 700MA	IP65 700mA 2W - 18W Driver	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

UL030

This versatile, swivel-mounted universal light offers endless possibilities and ensures that any corner of a landscape can be lit, whether that's a pond, tree or anything in-between. With a 360° stainless-steel bracket, 12° beam angle, IP68 water-resistance rating and bright 4.6W LED light output equivalent to a 35W halogen, it throws light into even the darkest and wettest environments.