



Versa Tile White 1500mm

UGR19 architectural linear suitable for surface, suspension or wall mount

Features

| | |
|-------------------------------|---------------------------------|
| IK Rating | IK02 |
| IP Rating | IP20 |
| CSP Switchable | Single CCT |
| UGR | 19 |
| Sensor Option | PIR & Daylight with accessories |
| Dimmable Option | Yes (DALI-2, PUSH-DIM) |
| LED Lifetime | L80 54,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM6 |
| Emergency Option | Yes, Self-Test |

Installation information

| | |
|----------------------------------|---|
| Install Connector Type | Push-fit terminal, loop-in/loop-out |
| Inrush Current | Standard: 16A 672s, DALI: 30A 45s |
| Construction Material | Aluminium Housing, Polystyrene Diffuser |
| Weight | 4.25kg |
| Ambient Temperature Range | 0°C - 40°C |
| Electric Class (1, 2, 3) | 1 |

Photometrics @ 25°C

| Product code | Finish | Feature I | Feature II | Feature III | W | Colour | Beam | lm | lm/W | EM |
|--------------|--------------------|-----------|------------|-------------|-----|--------|------|------|------|-----|
| VTWIN | Matt white RAL9003 | Non-Dim | - | - | 45W | 4000K | 80 | 5500 | 120 | - |
| VTWINEM | Matt white RAL9003 | Non-Dim | Emg | - | 45W | 4000K | 80 | 5500 | 120 | 260 |
| VTWIDEM | Matt white RAL9003 | Dimmable | Emg | - | 45W | 4000K | 80 | 5500 | 120 | 260 |
| VTWIDP | Matt white RAL9003 | Dimmable | - | PIR | 45W | 4000K | 80 | 5500 | 120 | - |
| VTWIDPEM | Matt white RAL9003 | Dimmable | Emg | PIR | 45W | 4000K | 80 | 5500 | 120 | 260 |
| VTWID | Matt white RAL9003 | Dimmable | - | - | 45W | 4000K | 80 | 5500 | 120 | - |
| VTWINP | Matt white RAL9003 | Non-Dim | - | PIR | 45W | 4000K | 80 | 5500 | 120 | - |
| VTWINPEM | Matt white RAL9003 | Non-Dim | Emg | PIR | 45W | 4000K | 80 | 5500 | 120 | 260 |

Energy rating is a reflection of the LED light source.

Wiring information

| | |
|--------------------------------|-------------------------|
| Cable / Flying Lead | 0.75-2.5mm ² |
| Type of Wiring Required | Parallel |

Accessories

| | | |
|----------------|-------------------------|-----------------|
| VTWWALL | White Wall Mount Kit | Sold Separately |
| VTWCON | White Connect Joint Kit | Sold Separately |



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years (product), 5 years (emerg battery)

Features & benefits

Slim depth of just 38mm

UGR19 for low glare

75% down / 25% up ratio uses light efficiently

Energy efficient up to 120lm/W

Choice of White (RAL9003), Black (RAL9005) or Silver (RAL9006)

Suspend as an individual luminaire or (by custom request) connect together to make a continuous run

>10% uplight when surface mounted

Configurable using our unique VERSABOX design to realise a range of lumen output, driver and sensor options


DALI-2 driver is switchable to enable lower lumen outputs

Supplied with suspension kit


Light source energy efficiency:



Beam angle: 80

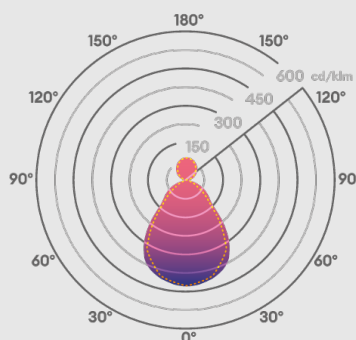

1558mm



38mm

