



Versa Tile White 1500mm

UGR19 architectural linear suitable for surface, suspension or wall mount

Features

IK Rating	IK02
IP Rating	IP20
CSP Switchable	Single CCT
UGR	19
Sensor Option	PIR & Daylight with accessories
Dimmable Option	Yes (DALI-2, PUSH-DIM)
LED Lifetime	L80 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Self-Test

Installation information

Install Connector Type	Push-fit terminal, loop-in/loop-out
Inrush Current	Standard: 16A 672s, DALI: 30A 45s
Construction Material	Aluminium Housing, Polystyrene Diffuser
Weight	4.25kg
Ambient Temperature Range	0°C - 40°C
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	Feature III	W	Colour	Beam	lm	lm/W	EM
VTWIN	Matt white RAL9003	Non-Dim	-	-	45W	4000K	80	5500	120	-
VTWINEM	Matt white RAL9003	Non-Dim	Emg	-	45W	4000K	80	5500	120	260
VTWIDEM	Matt white RAL9003	Dimmable	Emg	-	45W	4000K	80	5500	120	260
VTWIDP	Matt white RAL9003	Dimmable	-	PIR	45W	4000K	80	5500	120	-
VTWIDPEM	Matt white RAL9003	Dimmable	Emg	PIR	45W	4000K	80	5500	120	260
VTWID	Matt white RAL9003	Dimmable	-	-	45W	4000K	80	5500	120	-
VTWINP	Matt white RAL9003	Non-Dim	-	PIR	45W	4000K	80	5500	120	-
VTWINPEM	Matt white RAL9003	Non-Dim	Emg	PIR	45W	4000K	80	5500	120	260

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	0.75-2.5mm ²
Type of Wiring Required	Parallel

Accessories

VTWWALL	White Wall Mount Kit	Sold Separately
VTWCON	White Connect Joint Kit	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years (product), 5 years (emerg battery)

Features & benefits

Slim depth of just 38mm

UGR19 for low glare

75% down / 25% up ratio uses light efficiently

Energy efficient up to 120lm/W

Choice of White (RAL9003), Black (RAL9005) or Silver (RAL9006)

Suspend as an individual luminaire or (by custom request) connect together to make a continuous run

>10% uplight when surface mounted

Configurable using our unique VERSABOX design to realise a range of lumen output, driver and sensor options


DALI-2 driver is switchable to enable lower lumen outputs

Supplied with suspension kit


Light source energy efficiency:



Beam angle: 80

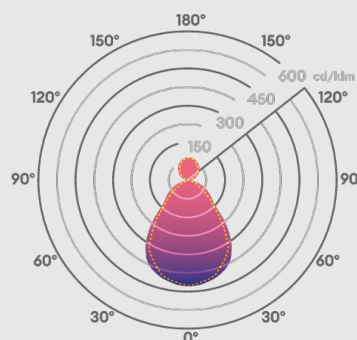

1558mm



38mm

