



# Versa Tile White 1500mm

UGR19 architectural linear suitable for surface, suspension or wall mount

## Features

<b>IK Rating</b>	IK02
<b>IP Rating</b>	IP20
<b>CSP Switchable</b>	Single CCT
<b>UGR</b>	19
<b>Sensor Option</b>	PIR & Daylight with accessories
<b>Dimmable Option</b>	Yes (DALI-2, PUSH-DIM)
<b>LED Lifetime</b>	L80 54,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM6
<b>Emergency Option</b>	Yes, Self-Test

## Installation information

<b>Install Connector Type</b>	Push-fit terminal, loop-in/loop-out
<b>Inrush Current</b>	Standard: 16A 672s, DALI: 30A 45s
<b>Construction Material</b>	Aluminium Housing, Polystyrene Diffuser
<b>Weight</b>	4.25kg
<b>Ambient Temperature Range</b>	0°C - 40°C
<b>Electric Class (1, 2, 3)</b>	1

## Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	Feature III	W	Colour	Beam	lm	lm/W	EM
VTWIN	Matt white RAL9003	Non-Dim	-	-	45W	4000K	80	5500	120	-
VTWINEM	Matt white RAL9003	Non-Dim	Emg	-	45W	4000K	80	5500	120	260
VTWIDEM	Matt white RAL9003	Dimmable	Emg	-	45W	4000K	80	5500	120	260
VTWIDP	Matt white RAL9003	Dimmable	-	PIR	45W	4000K	80	5500	120	-
VTWIDPEM	Matt white RAL9003	Dimmable	Emg	PIR	45W	4000K	80	5500	120	260
VTWID	Matt white RAL9003	Dimmable	-	-	45W	4000K	80	5500	120	-
VTWINP	Matt white RAL9003	Non-Dim	-	PIR	45W	4000K	80	5500	120	-
VTWINPEM	Matt white RAL9003	Non-Dim	Emg	PIR	45W	4000K	80	5500	120	260

Energy rating is a reflection of the LED light source.

## Wiring information

<b>Cable / Flying Lead</b>	0.75-2.5mm <sup>2</sup>
<b>Type of Wiring Required</b>	Parallel

## Accessories

<b>VTWWALL</b>	White Wall Mount Kit	Sold Separately
<b>VTWCON</b>	White Connect Joint Kit	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

7 years (product), 5 years (emerg battery)

## Features & benefits

Slim depth of just 38mm

UGR19 for low glare

75% down / 25% up ratio uses light efficiently

Energy efficient up to 120lm/W

Choice of White (RAL9003), Black (RAL9005) or Silver (RAL9006)

Suspend as an individual luminaire or (by custom request) connect together to make a continuous run

>10% uplight when surface mounted

Configurable using our unique VERSABOX design to realise a range of lumen output, driver and sensor options


DALI-2 driver is switchable to enable lower lumen outputs

Supplied with suspension kit


Light source energy efficiency:



Beam angle: 80

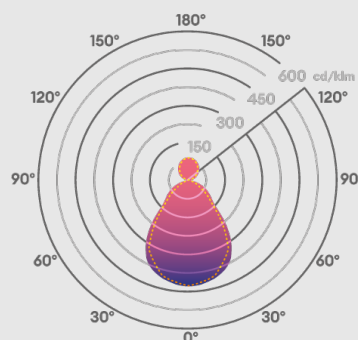

1558mm



38mm

