

Wall lights specification sheet



WL013

IP65, 390lm up-down wall light

Features

IK Rating	IK04
IP Rating	IP65
CSP Switchable	Single CCT
Dimmable Option	No
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6

Installation information

UK Bathroom Zone	N/A
Inrush Current	20A 0.5ms
Construction Material	Powder coated aluminium
Weight	467g
Ambient Temperature Range	40°C
SELV	Yes
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
WL013X30	Black RAL9011	6.5W	3000K	107°/91°	390	60	99
WL013G30	Grey RAL7022	6.5W	3000K	107°/91°	390	60	99

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	N/A
Type of Wiring Required	Parallel

Accessories

N/A	No accessories required
-----	-------------------------



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

5 years


Features & benefits

- 6.5W
- Integral bracket for easy installation
- IP65 ideal for outdoor environments
- Ideal for framing doorways and entrances
- Straight to mains screw terminals
- Durable powder coated aluminium in contemporary black or grey finish
- Up & down light for creating a feature of perimeters and entrances
- Sleek curved design

Light source energy efficiency:



Beam angle: 107°/91°

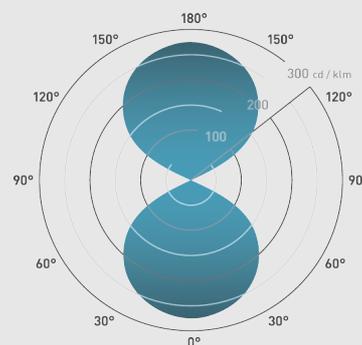

90mm 51.5mm 36.5mm

