

WL95

IP65 CCT & wattage switchable bulkhead with white housing & conduit entries

Features

IK Rating	IK10
IP Rating	IP65
CSP Switchable	Switchable CCT
Sensor Option	Microwave (Step-Dim)
Dimmable Option	No
LED Lifetime	L70 35,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual-Test

Installation information

Install Connector Type	4 ways, push-fit
UK Bathroom Zone	2
Inrush Current	10A 50s
Construction Material	ABS housing PC diffuser
Weight	850g
Ambient Temperature Range	-20°C - 40°C
Electric Class (1, 2, 3)	2

Wiring information

Cable / Flying Lead	Push-fit terminals, 1.5mm ² max, loop-in/loop-out.
Type of Wiring Required	Parallel

Accessories

WL95BEW	White Eyelid Accessory	Sold Separately
---------	------------------------	-----------------



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

3 years

Features & benefits

CCT switchable between 3000K, 4000K & 6500K

Wattage switchable between 18W & 27W

Emergency option available

Slimline design

Multiple mounting options: BESA box, M20 conduit, cable glands

IP65 rated, making it perfect for using outdoors

High efficacy of 120lm/W

Multiple black bezel options available



Easy access push fit screwless terminals

Microwave step-dim dusk-dawn sensor, which is programmable by dip switches, saving energy by having it on only when needed

Light source
energy efficiency:



Beam angle: 115°

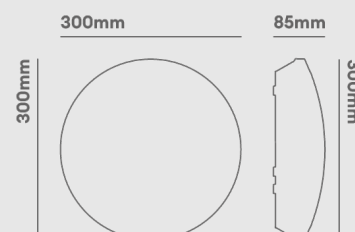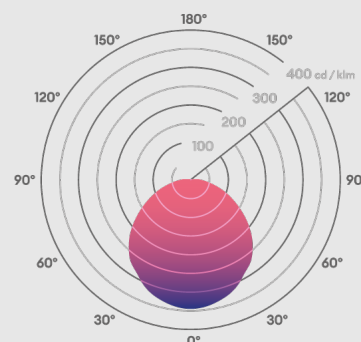

Photometrics @ 25°C


Product code	Finish	Feature I	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
WL9527SCS	White	Standard	18W	3000K	115°	2100	116	695	-
WL9527SCS	White	Standard	18W	4000K	115°	2150	119	712	-
WL9527SCS	White	Standard	18W	6500K	115°	2150	119	712	-
WL9527SCS	White	Standard	27W	3000K	115°	3100	114	1026	-
WL9527SCS	White	Standard	27W	4000K	115°	3200	118	1060	-
WL9527SCS	White	Standard	27W	6500K	115°	3200	118	1060	-
WL9527ECS	White	Emergency	18W	3000K	115°	2100	116	695	120
WL9527ECS	White	Emergency	18W	4000K	115°	2150	119	712	120
WL9527ECS	White	Emergency	18W	6500K	115°	2150	119	712	120
WL9527ECS	White	Emergency	27W	3000K	115°	3100	114	1026	120
WL9527ECS	White	Emergency	27W	4000K	115°	3200	118	1060	120
WL9527ECS	White	Emergency	27W	6500K	115°	3200	118	1060	120
WL9527MCS	White	Microwave Sensor	15W	3000K	115°	1650	110	546	-
WL9527MCS	White	Microwave Sensor	15W	4000K	115°	1750	116	579	-
WL9527MCS	White	Microwave Sensor	15W	6500K	115°	1750	116	579	-
WL9527MCS	White	Microwave Sensor	25W	3000K	115°	2800	112	927	-
WL9527MCS	White	Microwave Sensor	25W	4000K	115°	3000	120	993	-
WL9527MCS	White	Microwave Sensor	25W	6500K	115°	3000	120	993	-
WL9527CCS	White	Microwave and Emergency	15W	3000K	115°	1650	110	546	120
WL9527CCS	White	Microwave and Emergency	15W	4000K	115°	1750	116	579	120
WL9527CCS	White	Microwave and Emergency	15W	6500K	115°	1750	116	579	120
WL9527CCS	White	Microwave and Emergency	25W	3000K	115°	2800	112	927	120
WL9527CCS	White	Microwave and Emergency	25W	4000K	115°	3000	120	993	120
WL9527CCS	White	Microwave and Emergency	25W	6500K	115°	3000	120	993	120
WL9527SCSB	Black	Standard	18W	3000K	115°	2100	116	695	-
WL9527SCSB	Black	Standard	18W	4000K	115°	2150	119	712	-
WL9527SCSB	Black	Standard	18W	6500K	115°	2150	119	712	-
WL9527SCSB	Black	Standard	27W	3000K	115°	3100	114	1026	-
WL9527SCSB	Black	Standard	27W	4000K	115°	3200	118	1060	-
WL9527SCSB	Black	Standard	27W	6500K	115°	3200	118	1060	-
WL9527ECB	Black	Emergency	18W	3000K	115°	2100	116	695	120
WL9527ECB	Black	Emergency	18W	4000K	115°	2150	119	712	120
WL9527ECB	Black	Emergency	18W	6500K	115°	2150	119	712	120
WL9527ECB	Black	Emergency	27W	3000K	115°	3100	114	1026	120
WL9527ECB	Black	Emergency	27W	4000K	115°	3200	118	1060	120
WL9527ECB	Black	Emergency	27W	6500K	115°	3200	118	1060	120
WL9527MCB	Black	Microwave Sensor	15W	3000K	115°	1650	110	546	-
WL9527MCB	Black	Microwave Sensor	15W	4000K	115°	1750	116	579	-
WL9527MCB	Black	Microwave Sensor	15W	6500K	115°	1750	116	579	-
WL9527MCB	Black	Microwave Sensor	25W	3000K	115°	2800	112	927	-


Energy rating is a reflection of the LED light source.




collingwood

01604 495 151
collingwoodlighting.com

 collingwoodled

 /collingwoodlighting

 collingwoodlighting

WL95

Bulkheads are a simple yet functional product that offer a practical solution for lighting commercial spaces, corridors and stairways, as well as indoor and outdoor communal spaces. With a high efficacy and a choice of two lumen levels, this easy install, colour switchable light is a robust and durable option.