

# Halo Wall Light

12W Wall Light CSP Switchable

## Features

IK Rating	IK10
IP Rating	IP65
CSP Switchable	Switchable CCT
Sensor Option	Microwave
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes

## Installation information

Install Connector Type	Loop in / Loop out
UK Bathroom Zone	2
Inrush Current	7.36A 0.03ms
Construction Material	Polycarbonate
Weight	WLHAIN: 0.890kg WLHAINE: 1.020kg WLHAIM: 0.940kg WLHAIME: 1.07kg
Ambient Temperature Range	-20°C - 45°C
Electric Class (1, 2, 3)	2

## Photometrics @ 25°C

Product code	Finish	Feature I	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
WLHAIN	Anthracite grey RAL7016	Standard	12W	3000K	110°	1250	104	409	-
WLHAIN	Anthracite grey RAL7016	Standard	12W	4000K	110°	1300	108	425	-
WLHAIN	Anthracite grey RAL7016	Standard	12W	5700K	110°	1350	113	441	-
WLHAINE	Anthracite grey RAL7016	Emergency	12W	3000K	110°	1250	104	409	200
WLHAINE	Anthracite grey RAL7016	Emergency	12W	4000K	110°	1300	108	425	200
WLHAINE	Anthracite grey RAL7016	Emergency	12W	5700K	110°	1350	113	441	200
WLHAIM	Anthracite grey RAL7016	Microwave sensor	12W	3000K	110°	1250	104	409	-
WLHAIM	Anthracite grey RAL7016	Microwave sensor	12W	4000K	110°	1300	108	425	-
WLHAIM	Anthracite grey RAL7016	Microwave sensor	12W	5700K	110°	1350	113	441	-
WLHAIME	Anthracite grey RAL7016	Microwave and Emergency	12W	3000K	110°	1250	104	409	200
WLHAIME	Anthracite grey RAL7016	Microwave and Emergency	12W	4000K	110°	1300	108	425	200
WLHAIME	Anthracite grey RAL7016	Microwave and Emergency	12W	5700K	110°	1350	113	441	200

Energy rating is a reflection of the LED light source.

## Wiring information

Cable / Flying Lead	2x 6242Y 1.5mm <sup>2</sup> Twin and Earth Cables or H05RN-F 3x 1.0mm <sup>2</sup>
Type of Wiring Required	Parallel



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

5 years

## Features & benefits

360-degree lit effect

IK10 perfect for external use

CCT switchable between 3000K, 4000K & 5700K

HALO lit effect provides a 360-degree soft glow around the product to help the entrance of your building create interest and appear welcoming

Set to 3000K as standard to minimise low blue light content and disruption to the nocturnal ecosystem

Option to have integral microwave sensor to automatically switch the light OFF during daylight and when there is no presence to save energy


Emergency product (only) features a simple push-button to make it easy to test the battery status

Suitable for use in a coastal application

Light source energy efficiency:




Beam angle: 110°

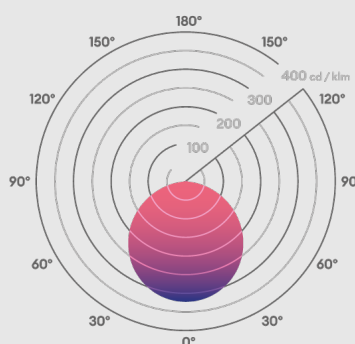

Ø275mm

67mm

275mm



### Accessories

WLHAEYE	Halo Wall Light CCT Anthracite Eyelid Accessory	Sold Separately
---------	---	-----------------




collingwood

01604 495 151  
[collingwoodlighting.com](https://www.collingwoodlighting.com)

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

---

### Halo Wall Light

HALO lit effect provides a 360-degree soft glow around the product to help the entrance of your building create interest and appear welcoming. Set to 3000K as standard to minimise low blue light content and disruption to the nocturnal ecosystem. IK10 & IP65 rated offering a product that is both decorative and functional.