


## 250A 4P Switch Disconnecter

Cat Number: 250L4PSD

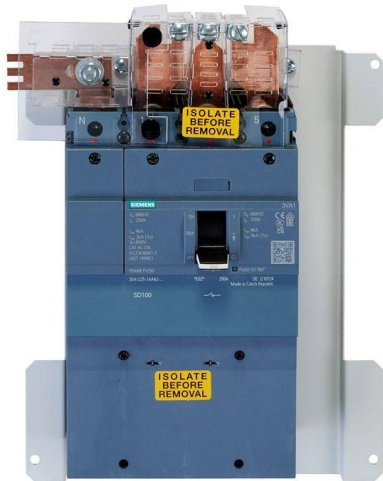

For use in Loadstar Distribution Boards.  
Supplied with mounting kits, links, and fixing screws.

### Technical Specifications:

Version as main switch | Yes  
Number of switches | 1  
Max. rated operation voltage Ue AC | 415 V  
Rated operating voltage | 415 V  
Rated permanent current Iu | 250 A  
Number of poles | 4  
Suitable for distribution board installation | Yes  
Degree of protection (IP), front side | IP3X  
Product Standard/s | BS EN 61439-3  
Terminal Capacity L&N | 120 mm<sup>2</sup>  
Frequency | 50 Hz  
CE Conformity | Yes  
WEEE Symbol | Yes  
UKCA Conformity | Yes

Amperage | 250 A

Pole Configuration | 4P

Operating Voltage | 415 V

Type of Current | AC