
Flexi RF
Reliable RF Components In Stock

Datasheet

1.85mm Female to 1.85mm Female Bulkhead Hermetically Sealed Straight Precision Adapter | DC-67GHz

P/N: FR1-1.85(M)-KYKE

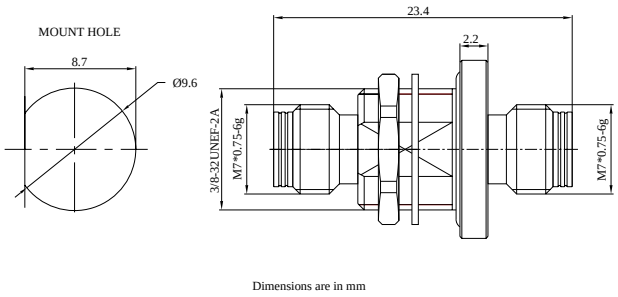

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	1.85mm
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated
Mount Method	Bulkhead	Bulkhead

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	1.5
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)


Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	7.2 g

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-65°C to +165°C
Hermetic Seal	1^10(-8) cc/sec of Helium at 1 ATM

Test Report

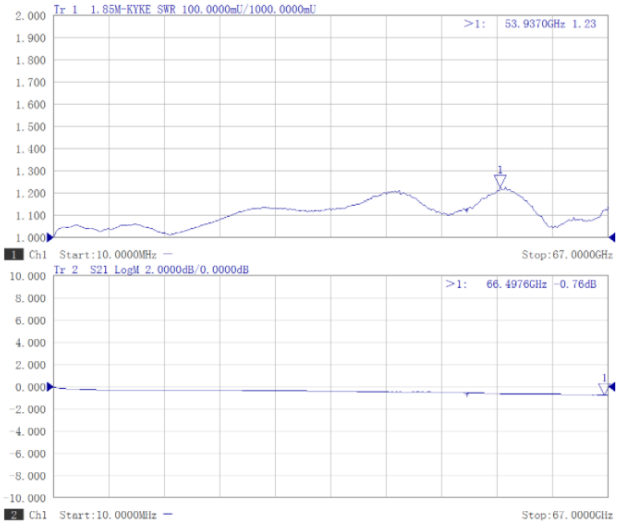

Flexi RF Inc

(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com