
Flexi RF
Reliable RF Components In Stock

Datasheet

1.85mm Female RF Load Termination Up To 67 GHz | 0.5 Watts | Passivated Stainless Steel

P/N: FR3-1.85-K-03

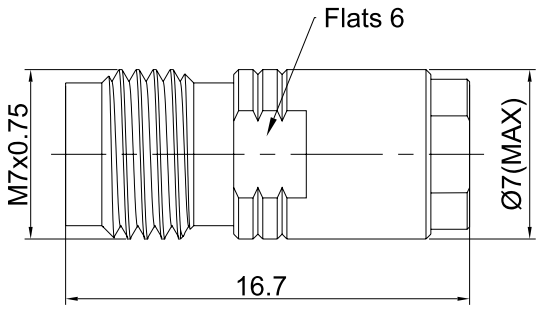

Dimensions are in mm



Product Configuration

Connector Series	1.85mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	1.45
Power, Max Input (Watts)	0.5


Mechanical Data


Min. Mating Cycles	≥500
Weight	3.4 g
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Test Report

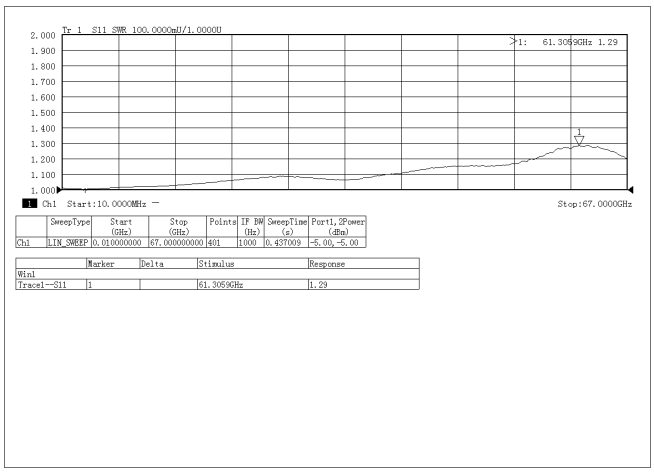

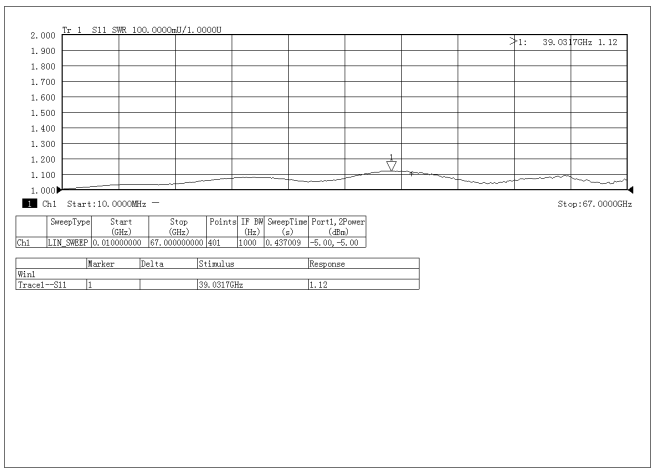

Flexi RF Inc

(650)880-9199
20045 Stevens Creek Blvd., Suite 2B, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com