




# 2.4mm Female to GPPO(Mini-SMP) Male Straight Precision Adapter DC-50GHz

P/N: FR1-2.4/GPPO-KJ



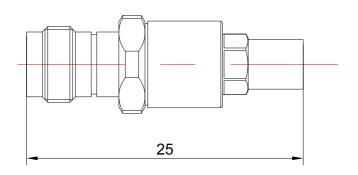

Dimensions are in mm

Product Configuration		
	Connector 1	Connector 2
Connector Series	2.4mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

### **Electrical Specifications**

DC - 50GHz Frequency

VSWR / Return Loss 1.25

Insertion Loss  $\leq$  0.05 x Sqrt.(f\_GHz)

### **Mechanical Data**

Min. Mating Cycles ≥500 Weight (g) 5.4 g

## **Environmental Specifications**

**RoHS Compliant** 

-55 °C to +165 °C Operating Temperature Range

#### Flexi RF Inc

① (650)880-9199

sales@flexirf.com