


2.4mm Female to SSMA Female Straight Precision Adapter | DC to 40 GHz

P/N: FR1-2.4/SSMA-KKS

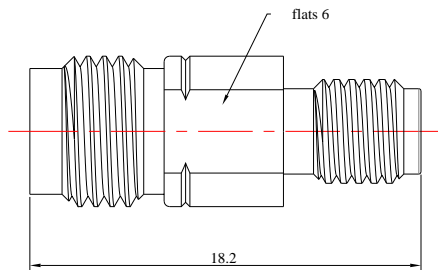

Dimensions are in mm

Product Configuration		
	Connector 1	Connector 2
Connector Series	2.4mm	SSMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.20 to 40 GHz
Insertion Loss	$\leq 0.05 \times \text{Sqrt.}(f_GHz)$

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C