


2.4mm Female to SSMA Female Straight Precision Adapter | DC to 40 GHz

P/N: 2.4/SSMA-KKS

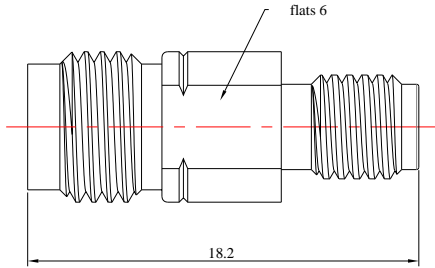

Dimensions are in mm

### Product Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	SSMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated
Body Style	Straight	Straight

### Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.20 to 40 GHz
Insertion Loss	$\leq 0.05 \times \text{Sqrt.}(f\_GHz)$

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C