
Gwave
Fast Delivery RF Parts.

Datasheet

2.4mm Male RF Load Termination Up To 40 GHz | 2 Watts | Passivated Stainless Steel

P/N: 2.4-J-03-2W



Dimensions are in mm



Product Configuration

Connector Series	2.4mm
Connector Polarity	Standard
Connector Gender	Male
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC -40GHz
VSWR / Return Loss	1.25
Power, Max Input (Watts)	2


Mechanical Data


Min. Mating Cycles	≥500
Weight	3.6 g
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC
MIL/STD	N/A

Test Report

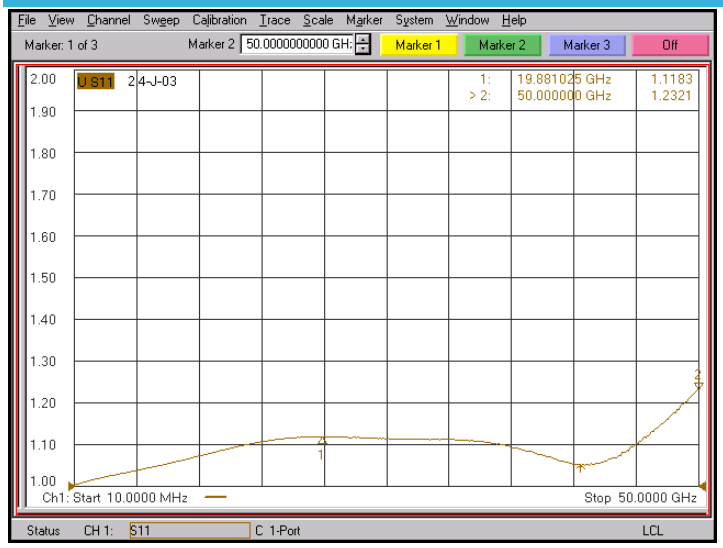

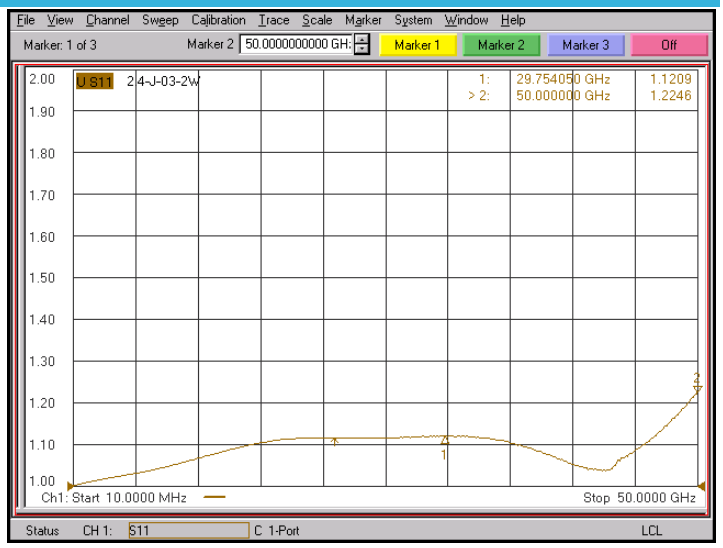

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com