


2.4mm Female Connector for .086" Series Cables | DC - 50GHz

2.4-KB2

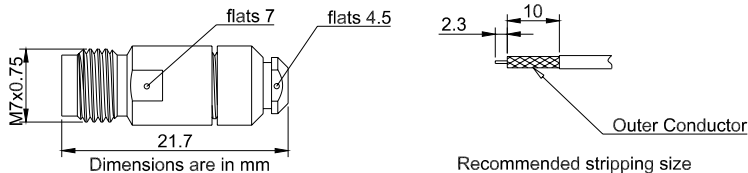

Product Configuration Cable

| | |
|---------------------------|----------|
| Connector Series | 2.4mm |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Body Style | Straight |
| Termination Type | Coax |
| Connector Impedance (Ohm) | 50 |
| Mount Method | None |

Mechanical Data

| | |
|--------------------|-----------------|
| Min. Mating Cycles | ≥500 |
| Weight (g) | 5.19 g |
| Body Material | Stainless Steel |
| Body Plating | Passivated |

Electrical Specifications

| | |
|--------------------|-----------------------|
| Frequency | DC - 50GHz |
| VSWR / Return Loss | 1.35 |
| Insertion Loss | ≤ 0.05 x Sqrt.(f_GHz) |

Enviromental Specifications

| | |
|-----------------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 °C to +165 °C |
| MIL/STD | N/A |