


2.4mm Solderless End Launch Female RF Connectors | DC–50GHz | 0.25mm Pin for [2.4-KFD0851](#)
PCB Contact | 50Ω Edge Mount

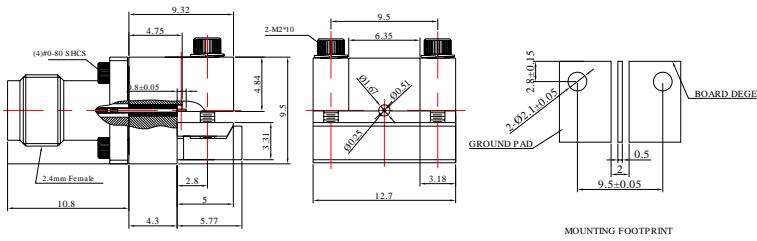

Product Configuration

| | |
|---------------------------|------------|
| Connector Series | 2.4mm |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Body Style | Straight |
| Termination Type | PCB |
| Connector Impedance (Ohm) | 50 |
| Mount Method | End Launch |

Mechanical Data

| | |
|--------------------|-----------|
| Min. Mating Cycles | ≥500 |
| Weight (g) | 10 g |
| Body Material | Brass |
| Body Plating | Tri-Metal |

Electrical Specifications

| | |
|--------------------|----------------------|
| Frequency | DC - 50GHz |
| VSWR / Return Loss | 1.25 |
| Insertion Loss | ≤ 0.1 x Sqrt.(f_GHz) |

Environmental Specifications

| | |
|-----------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature | -55 °C to +165 °C |
| Range | |
| MIL/STD | N/A |