
Datasheet

2.4mm Female Solderless PCB Connector with 2 Hole Flange for Stripline | DC - 50GHz

P/N: FR2-2.4-KFD216-1



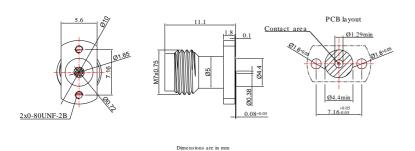

Product Configuration

Body Style Straight
Connector Series 2.4mm
Connector Polarity Standard
Connector Gender Female
Termination Type PCB
Connector Impedance (Ohm) 50

Mount Method 2 Hole Flange

Electrical Specifications

Frequency DC - 50GHz

VSWR / Return Loss 1.25

Insertion Loss $\leq 0.05 \text{ x Sqrt.}(f_GHz)$

Mechanical Data

Min. Mating Cycles ≥500
Weight 1.9 g

Body Material Stainless Steel
Body Plating Passivated

Environmental Specifications

RoHS Compliant Yes

Operating Temperature Range -55 °C to +165 °C

MIL/STD N/A

Flexi RF Inc

(a) (650)880-9199

- sales@flexirf.com
- (9) 3070 Scott Blvd, Santa Clara, CA 95054-3325
- www.flexirf.com