


2.4mm Female Solderless PCB Connector with 2 Hole Flange for CPW/Microstrip | **2.4-KFD216**  
DC - 50GHz | 1.19mm Slot

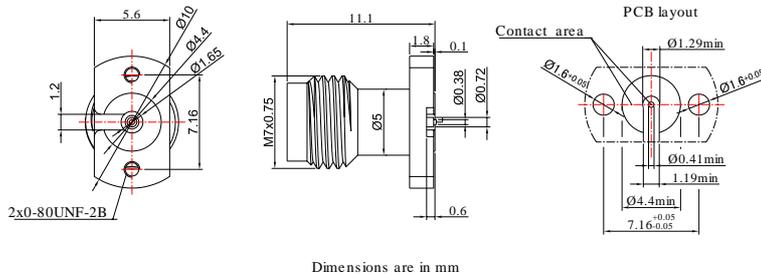

**Product Configuration**

Connector Series	2.4mm
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

**Mechanical Data**

Min. Mating Cycles	≥500
Weight (g)	1.8 g
Body Material	Stainless Steel
Body Plating	Passivated

**Electrical Specifications**

Frequency	DC - 50GHz
VSWR / Return Loss	1.25
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A