


2.92mm Female to 1.85mm Male Adapter | DC - 40GHz

Datasheet

2.92/1.85-KJS

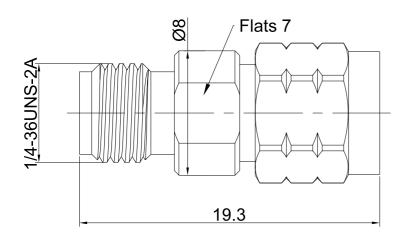

Dimensions are in mm



Connector 1 Series	2.92mm
Connector 1 Polarity	Standard
Connector 1 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	None
Connector 2 Series	1.85mm
Connector 2 Polarity	Standard
Connector 2 Gender	Male
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	None

Electrical Specifications

Frequency
VSWR / Return Loss
Insertion Loss

DC-40GHz 1.15 ≤0.05 xSqt.(f_GHz)

Mechanical Data	
Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Stainless Steel
Connector 2 Body Plating	Passivated
Min. Mating Cycles	≥500
Weight (g)	3.9 g

Enviromental Specifications		
RoHS Compliant	Yes	
Operating Temperature	-55 °C to +165 °C	
Range		
MIL/STD	N/A	

e www.gwavetech.com