


2.92mm Male to 2.4mm Male Adapter, DC - 40GHz

FR1-2.92/2.4-JJS



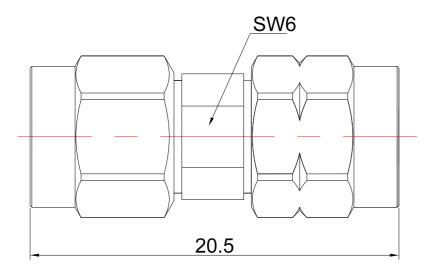

Dimensions are in mm

Product Configuration

Connector 1 Series	2.92mm
Connector 1 Polarity	Standard
Connector 1 Gender	Male
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	None
Connector 2 Series	2.4mm
Connector 2 Polarity	Standard
Connector 2 Gender	Male
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	None
Body Style	Straight

Mechanical Data	
Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Stainless Steel
Connector 2 Body Plating	Passivated
Mating Cycles, Min	≥500
Weight	4.8 g

Electrical Specifications

Frequency VSWR Insertion Loss DC-40GHz 1.15 ≤0.04 xSqt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature	-55 °C to +165 °C
Range	
MIL/STD	N/A

Flexi RF Inc

- ③ 3070 Scott Blvd, Santa Clara, CA 95054-3325
- sales@flexirf.com
- e www.flexirf.com