


2.92mm Male to GPPO(Mini-SMP) Male Straight Precision Adapter | DC-40GHz

P/N: FR1-2.92/GPPO-JJ



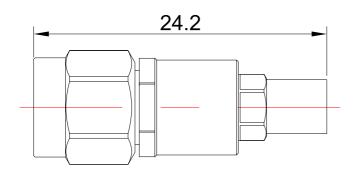

Dimensions are in mm

| Product Configuration | | |
|---------------------------|-----------------|-----------------|
| | Connector 1 | Connector 2 |
| Connector Series | 2.92mm | GPPO(Mini-SMP) |
| Connector Polarity | Standard | Standard |
| Connector Gender | Male | Male |
| Connector Impedance (Ohm) | 50 | 50 |
| Body Style | Straight | Straight |
| Connector Body Material | Stainless Steel | Stainless Steel |
| Connector Body Plating | Passivated | Passivated |

Electrical Specifications

Frequency DC - 40GHz


VSWR / Return Loss 1.25

Insertion Loss \leq 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles ≥500 Weight (g) 5.7 g

Test Report



Enviromental Specifications

RoHS Compliant

-55 °C to +165 °C Operating Temperature Range

Flexi RF Inc