


2.92mm Female to GPPO(Mini-SMP) Female Straight Precision Adapter | DC- 40GHz | P/N: 2.92/GPPO-KK

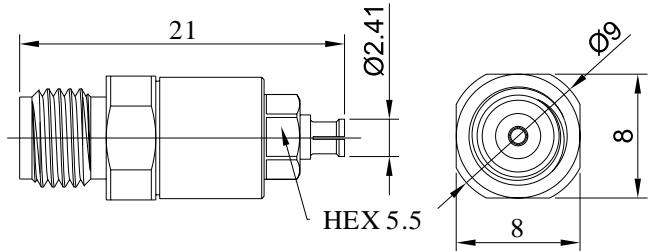

Dimensions are in mm


Product Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold
Body Style	Straight	Straight

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.25
Insertion Loss	$\leq 0.05 \times \text{Sqrt.(f_GHz)}$

Test Report

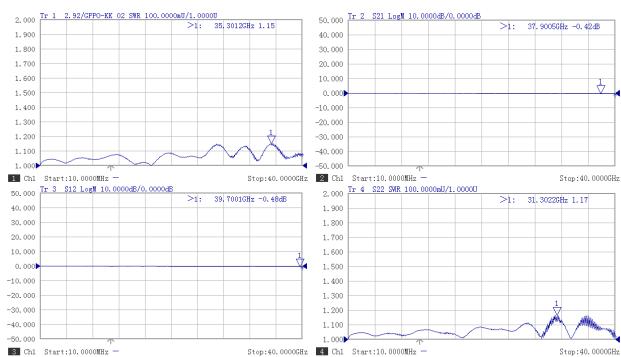

Mechanical Data

Min. Mating Cycles	≥ 500
Weight (g)	4.6 g

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A