
2.92mm Female to SSMA Male Straight Precision Adapter | DC to 40 GHz

P/N: FR1-2.92/SSMA-KJS



Dimensions are in mm

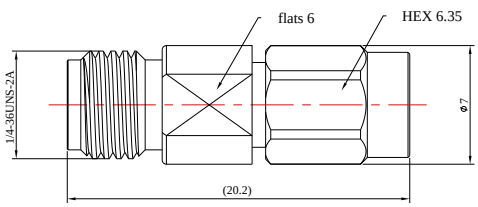


Product Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	SSMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.20 to 40 GHz
Insertion Loss	≤ 0.04 x Sqrt.(f_GHz)

Test Report

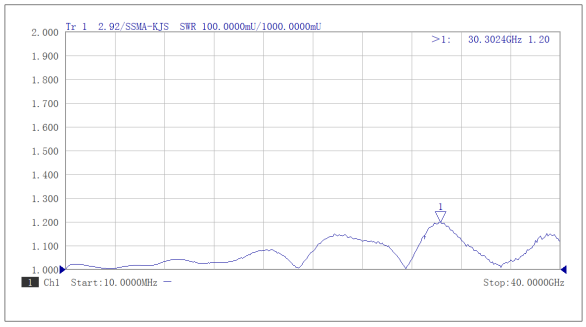

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com