
Flexi RF
Reliable RF Components In Stock

Datasheet

2.92mm Female to SSMA Female Straight Precision Adapter | DC to 40 GHz

P/N: FR1-2.92/SSMA-KKS

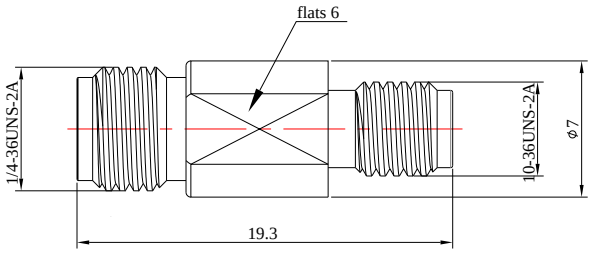

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	SSMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.20 to 40 GHz
Insertion Loss	≤ 0.04 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com