


Datasheet

2.92mm Male to 2.92mm Female Adapter with 4 Hole Flange | DC - 40GHz





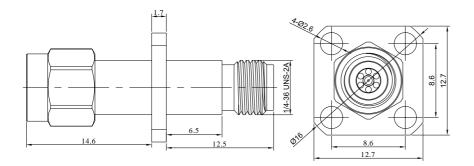

Dimensions are in mm

Product Configuration

Connector 1 Series	2.92mm
Connector 1 Polarity	Standard
Connector 1 Gender	Male
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	4 Hole Flange
Connector 2 Series	2.92mm
Connector 2 Polarity	Standard
Connector 2 Gender	Female
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	4 Hole Flange
Body Style	Straight

Mechanical Data	
Connector 1 Body Material	Stainless Steel
Connector 1 Body Plating	Passivated
Connector 2 Body Material	Stainless Steel
Connector 2 Body Plating	Passivated
Min. Mating Cycles	≥500
Weight	7 g

Electrical Specifications

Frequency VSWR / Return Loss Insertion Loss DC-40GHz 1.2 ≤0.05 xSqt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature	-55 °C to +165 °C
Range	
MIL/STD	N/A

e www.flexirf.com