


# **Datasheet**

2.92mm Male to 2.92mm Male Adapter | DC - 40GHz

2.92-JJS



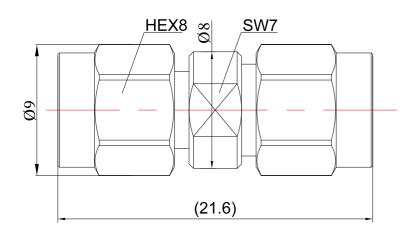

Dimensions are in mm

## **Product Configuration**

Connector 1 Series 2.92mm Standard Connector 1 Polarity Connector 1 Gender Male Connector 1 Impedance (Ohm) 50 Connector 1 Mount Method None 2.92mm Connector 2 Series Connector 2 Polarity Standard Male Connector 2 Gender Connector 2 Impedance (Ohm) 50 Connector 2 Mount Method None

#### **Mechanical Data**

Connector 1 Body Material Stainless Steel Passivated Connector 1 Body Plating Stainless Steel Connector 2 Body Material Connector 2 Body Plating **Passivated** Min. Mating Cycles ≥500 Weight (g) 5.1 g

## **Electrical Specifications**

DC-40GHz Frequency VSWR / Return Loss 1.15

Insertion Loss ≤0.05 xSqt.(f\_GHz)

# **Enviromental Specifications**

**RoHS Compliant** Yes

-55 °C to +165 °C Operating Temperature

Range

MIL/STD N/A