


Datasheet

2.92mm Male to 2.92mm Female Adjustable Phase Trimmer | 260 Degrees Phase Range | DC - 40GHz

P/N: 2.92-JPK



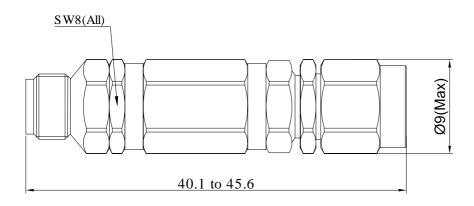



Dimensions are in mm

Product Configuration

Connector-In Series 2.92mm Standard Connector-In Polarity Male Connector-In Gender 50 Connector-In Impedance (Ohm) Connector-Out Series 2.92mm Connector-Out Polarity Standard Connector-Out Gender Female Connector-Out Impedance (Ohm) 50

Electrical Specifications

DC - 40GHz Frequency VSWR / Return Loss 1.5 Insertion Loss ≤ 0.8dB Adjustable Phase 260°

(388)251-2240

- sales@gwavetech.com www.gwavetech.com



Datasheet

2.92mm Male to 2.92mm Female Adjustable Phase Trimmer | 260 Degrees Phase Range | DC - 40GHz

P/N: 2.92-JPK

Mechanical Data

Weight (g) 11.6 g

Body Material Stainless Steel
Body Plating Passivated

Environmental Specifications

RoHS Compliant Yes

Operating Temperature Range -55 °C to +165 °C