
Gwave
Fast Delivery RF Parts.

Datasheet

2.92mm Female Termination Load | DC - 40GHz | 5Watts | Precision Microwave Dummy Load

P/N: 2.92-K-03-5W

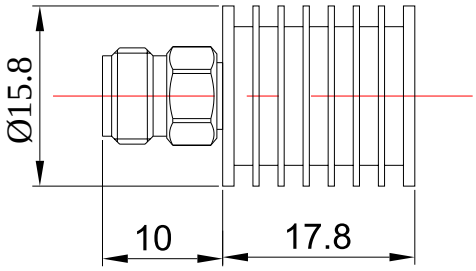

Dimensions are in mm



Product Configuration

Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.30 to 40GHz
Power, Max Input (Watts)	5

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Stainless Steel
Body Plating	Passivated

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com