


2.92mm Female Connector Field Replaceable with 4 Hole Flange | Acceptable Pin **2.92-KFD0130**
Diameter 0.3mm | DC - 40GHz

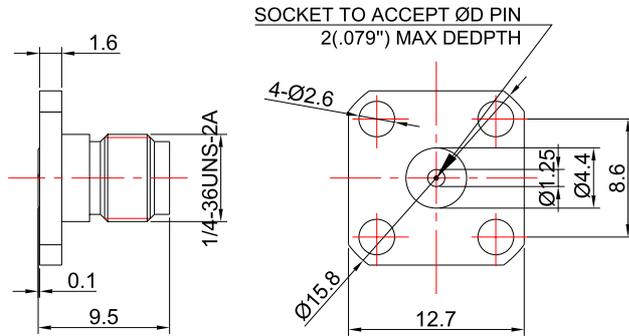

For glass-bead of 0.30mm pin diameter
Dimensions are in mm

Product Configuration

Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	4 Hole Flange

Mechanical Data

Min. Mating Cycles	≥500
Weight (g)	2.7 g
Body Material	Stainless Steel
Body Plating	Passivated

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.15
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A