


2.92 Female Field Replaceable Connector | 2 Hole Flange | Hole Spacing 10.2mm | [2.92-KFD0523](#)
Acceptable Pin Diameter 0.23mm | DC -40GHz

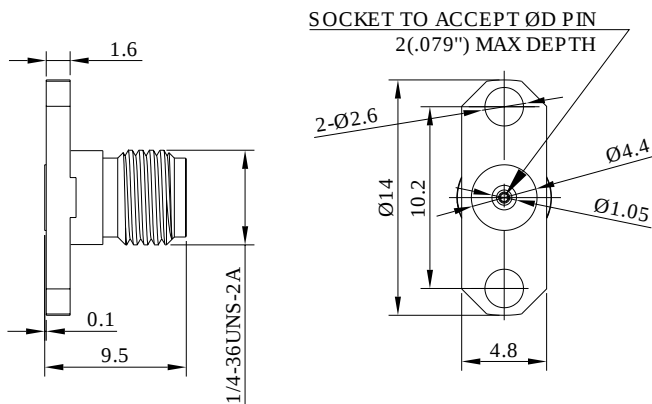

For Glass-bead of 0.23mm Pin Diameter

Dimensions are in mm

Product Configuration

Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Stainless Steel
Body Plating	Passivated

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.15
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A