


Datasheet

2.92mm Female Connector Field Replaceable with 2 Hole Flange | Hole Spacing 10.2mm | Acceptable Pin Diameter 0.38mm | DC - 40GHz

2.92-KFD0538



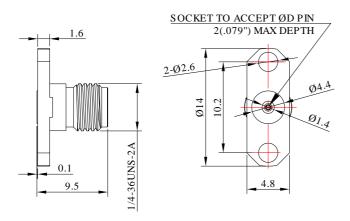

For Glass-bead of 0.38mm Pin Diameter

Dimensions are in mm

Product Configuration

Connector Series 2.92mm

Connector Polarity Standard

Connector Gender Female

Body Style Straight

Termination Type Field Replaceable Contact

Connector Impedance (Ohm) 50

Mount Method 2 Hole Flange

Mechanical Data

Min. Mating Cycles ≥500

Body Material Stainless Steel
Body Plating Passivated

Electrical Specifications

Frequency DC-40GHz VSWR / Return Loss 1.15

Insertion Loss ≤0.1 xSqt.(f_GHz)

Environmental Specifications

RoHS Compliant Yes

Operating Temperature -55 °C to +165 °C

Range

MIL/STD N/A

(I) (888)251-2240