


2.92mm End Launch Solderless Connector | 2 Hole Flange| Hole Spacing 5mm | Pin **2.92-KHD22**
0.26mm | DC-40GHz



Dimensions are in mm

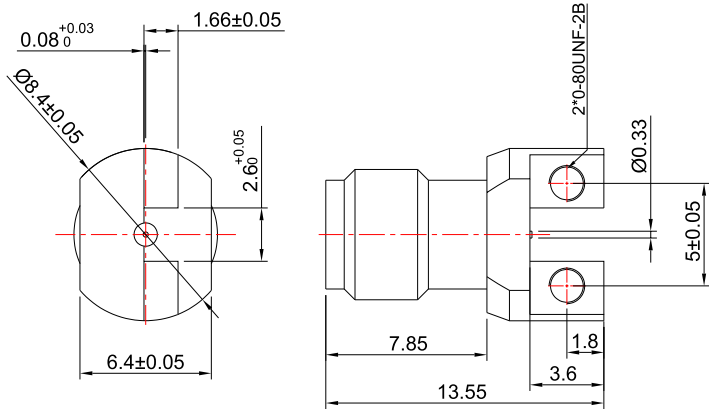

Product Configuration

Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Mechanical Data

Min. Mating Cycles	≥ 500
Body Material	Stainless Steel
Body Plating	Passivated

Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.25
Insertion Loss	$\leq 0.05 \times \text{Sqrt.}(f_GHz)$

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to $+165^{\circ}\text{C}$