
Datasheet

2.92mm Female Solderless End Launch Connector | No Soldering Required | DC–40GHz

2.92-KHD23-1



Dimensions are in mm

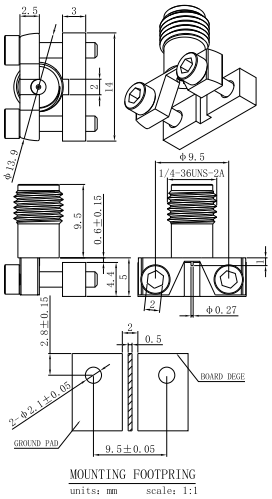

Product Configuration

Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Electrical Specifications

Frequency	DC to 40 GHz
VSWR / Return Loss	>14dB
Insertion Loss	≤0.1xSqt.(f_GHz)

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com