


Datasheet

3.5mm Male to 2.92mm Male Adapter, DC - 26.5GHz

FR1-3.5/2.92-JJS



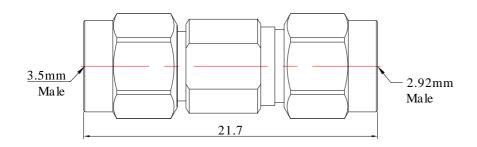

Dimensions are in mm

Product Configuration

Connector 1 Series 3.5mm Standard Connector 1 Polarity Male Connector 1 Gender Connector 1 Impedance (Ohm) 50 Connector 1 Mount Method None Connector 2 Series 2.92mm Connector 2 Polarity Standard Connector 2 Gender Male Connector 2 Impedance (Ohm) 50 Connector 2 Mount Method None Body Style Straight

Mechanical Data

Connector 1 Body Material Stainless Steel
Connector 1 Body Plating Passivated
Connector 2 Body Material Stainless Steel
Connector 2 Body Plating Passivated
Mating Cycles, Min ≥500
Weight 5.3 g

Electrical Specifications

Frequency DC-26.5GHz

VSWR 1.15

Insertion Loss ≤0.1 xSqt.(f GHz)

Enviromental Specifications

RoHS Compliant Yes

Operating Temperature -55 °C to +165 °C

Range

MIL/STD N/A

Flexi RF Inc

(a) (650)880-9199

sales@flexirf.com

(9) 3070 Scott Blvd, Santa Clara, CA 95054-3325

www.flexirf.com