


Datasheet

3.5mm Male to 2.92mm Female Adapter | DC - 26.5GHz

FR1-3.5/2.92-JKS



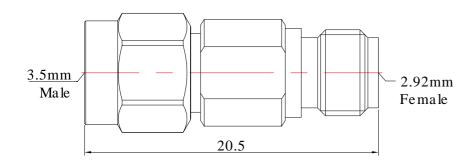

Dimensions are in mm

Product Configuration

Connector 1 Series 3.5mm Standard Connector 1 Polarity Male Connector 1 Gender Connector 1 Impedance (Ohm) 50 Connector 1 Mount Method None Connector 2 Series 2.92mm Connector 2 Polarity Standard Connector 2 Gender Female Connector 2 Impedance (Ohm) 50 Connector 2 Mount Method None Body Style Straight

Mechanical Data

Connector 1 Body Material Stainless Steel Passivated Connector 1 Body Plating Connector 2 Body Material Stainless Steel Passivated Connector 2 Body Plating Min. Mating Cycles ≥500 Weight 4.4 g

Electrical Specifications

DC-26.5GHz Frequency

VSWR / Return Loss 1.15

Insertion Loss ≤0.1 xSqt.(f GHz)

Enviromental Specifications

RoHS Compliant

-55 °C to +165 °C Operating Temperature

Range

MIL/STD N/A

Flexi RF Inc

(I) (650)880-9199

sales@flexirf.com

(9) 3070 Scott Blvd, Santa Clara, CA 95054-3325

(e) www.flexirf.com