


3.5mm Female to 2.92mm Male Adapter, DC - 26.5GHz

FR1-3.5/2.92-KJS

Datasheet



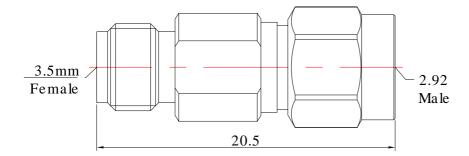

Dimensions are in mm

| Product Configuration | |
|-----------------------------|----------|
| Connector 1 Series | 3.5mm |
| Connector 1 Polarity | Standard |
| Connector 1 Gender | Female |
| Connector 1 Impedance (Ohm) | 50 |
| Connector 1 Mount Method | None |
| Connector 2 Series | 2.92mm |
| Connector 2 Polarity | Standard |
| Connector 2 Gender | Male |
| Connector 2 Impedance (Ohm) | 50 |
| Connector 2 Mount Method | None |
| Body Style | Straight |

| Mechanical Data | |
|---------------------------|-----------------|
| Connector 1 Body Material | Stainless Steel |
| Connector 1 Body Plating | Passivated |
| Connector 2 Body Material | Stainless Steel |
| Connector 2 Body Plating | Passivated |
| Mating Cycles, Min | ≥500 |
| Weight | 4.3 g |
| | |

| | | | 2 B |
|-----------|-------|-------|--------|
| LIACTRICA | I She | OITIO | atione |
| Electrica | | | |
| | | | |

Frequency VSWR Insertion Loss DC-26.5GHz 1.15 ≤0.1 xSqt.(f_GHz)

Enviromental Specifications

| RoHS Compliant | Yes | | |
|-----------------------|-------------------|--|--|
| Operating Temperature | -55 °C to +165 °C | | |
| Range | | | |
| MIL/STD | N/A | | |

- ③ 3070 Scott Blvd, Santa Clara, CA 95054-3325
- sales@flexirf.com
- e www.flexirf.com