
Datasheet

Low PIM 4.3/10 Female to N Female Straight Adapter | DC to 8 GHz

P/N: 4.3/10-N-KK



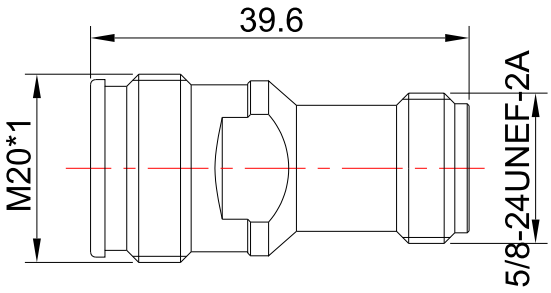

Dimensions are in mm

Product Configuration

	Connector 1	Connector 2
Connector Series	4.3/10	N
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Material	Brass	Brass
Connector Body Plating	Tri-Metal	Tri-Metal
Body Style	Straight	Straight


Electrical Specifications

Frequency	DC - 8GHz
VSWR / Return Loss	1.15 to 6 GHz
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)
Passive Intermodulation	<-160 dBc

Mechanical Data

Min. Mating Cycles	≥500

Test Report

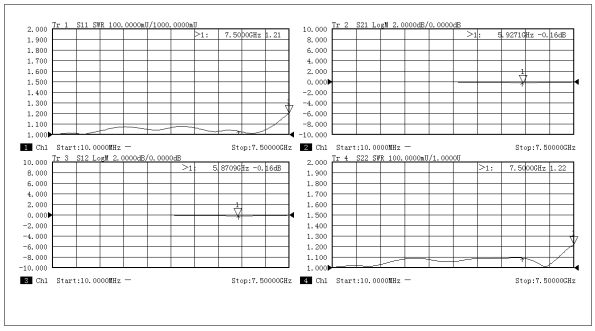

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55°C to +165°C

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com