
Flexi RF
Reliable RF Components In Stock

Datasheet

BMA Male Field Replaceable Connector | 4 Hole Flange | Hole Spacing 8.6mm | DC-22GHz | Accepts 0.38mm Pin

P/N: FR2-BMA-JFD0338



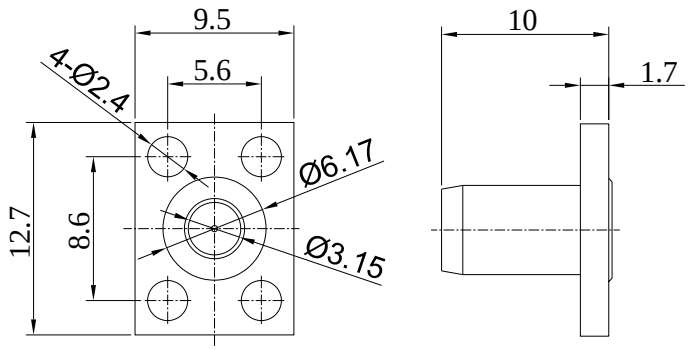

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	BMA
Connector Polarity	Standard
Connector Gender	Male
Termination Type	Field Replaceable Contact
Connector Impedance (Ohm)	50
Mount Method	4 Hole Flange

Electrical Specifications

Frequency	DC - 22GHz
VSWR / Return Loss	≤1.06+0.01xF(GHz)
Insertion Loss	≤ 0.03x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	CuSnZn

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-65 to +125

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com