


BNC Male to SMA Female Straight Adapter | DC to 4GHz

P/N: FR1-BNC/SMA-JK

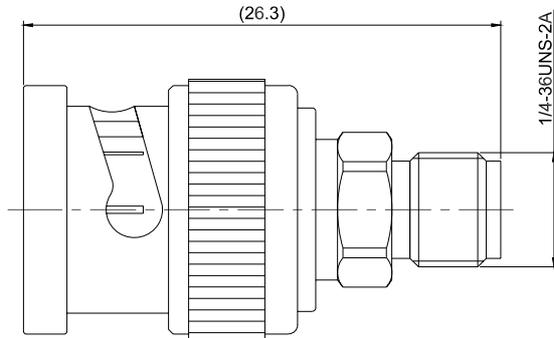

Dimensions are in mm

Product Configuration

| | Connector 1 | Connector 2 |
|---------------------------|-------------|-------------|
| Connector Series | BNC | SMA |
| Connector Polarity | Standard | Standard |
| Connector Gender | Male | Female |
| Connector Impedance (Ohm) | 50 | 50 |
| Body Style | Straight | Straight |
| Connector Body Material | Brass | Brass |
| Connector Body Plating | Tri-Metal | Gold |
| Mount Method | | None |

Electrical Specifications

| | |
|--------------------|---------------|
| Frequency | DC - 4GHz |
| VSWR / Return Loss | 1.25 to 4 GHz |

Mechanical Data

| | |
|--------------------|------|
| Min. Mating Cycles | ≥500 |
|--------------------|------|

Environmental Specifications

| | |
|-----------------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 °C to +165 °C |
| MIL/STD | N/A |

Test Report

