
Flexi RF
Reliable RF Components In Stock


Datasheet

BNC Female to SMA Male Straight Adapter | DC to 4GHz

P/N: FR1-BNC/SMA-KJ

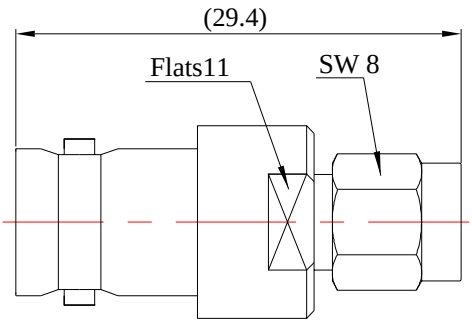

Dimensions are in mm



Product Configuration

	Connector 1	Connector 2
Connector Series	BNC	SMA
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Tri-Metal	Gold
Mount Method		None

Electrical Specifications

Frequency	DC - 4GHz
VSWR / Return Loss	1.25 to 4GHz

Mechanical Data

Min. Mating Cycles	≥500

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +165ºC
MIL/STD	N/A

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com