
Flexi RF
Reliable RF Components In Stock


Datasheet

G3PO (SMPS) Male 8 Channel Connector | DC - 65GHz

P/N: FR2-G3PO-J8MD

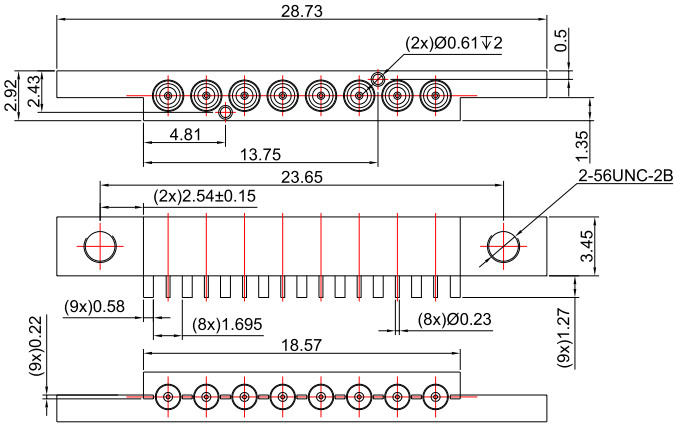

Dimensions are in mm

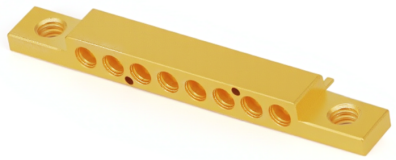

Product Configuration

Body Style	Straight
Connector Series	G3PO(SMPS)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 65GHz
VSWR / Return Loss	15dB to 65GHz
Insertion Loss	≤ 0.05 x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +85°C

Flexi RF Inc

(650)880-9199

20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014

sales@flexirf.com

www.flexirf.com