


G3PO (SMPS) Male Connector Solder Attachment Surface Mount PCB | Vertical Launch | DC - 50GHz

P/N: FR2-G3PO-JHD1-S



Dimensions are in mm

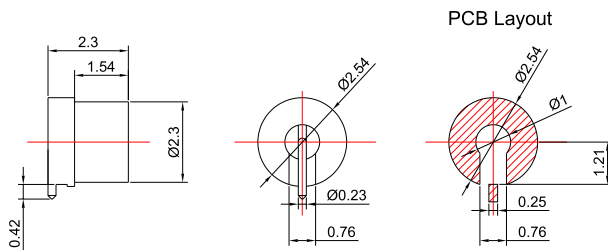

Product Configuration

Body Style	Straight
Connector Series	G3PO(SMPS)
Connector Polarity	Standard
Connector Gender	Male
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	None

Electrical Specifications

Frequency	DC - 50GHz
VSWR / Return Loss	14dB
Insertion Loss	≤ 0.1x Sqrt.(f_GHz)

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +155°C