
Datasheet

G3PO(SMPS) Female RF Load Termination Up To 67 GHz | 0.5 Watts | Gold Plated Beryllium Copper

P/N: G3PO-K-03



Dimensions are in mm

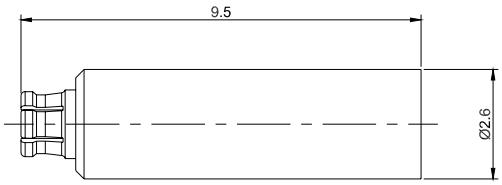

Product Configuration

Connector Series	G3PO(SMPS)
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

Frequency	DC - 67GHz
VSWR / Return Loss	1.4
Power, Max Input (Watts)	0.5

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Beryllium Copper
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC
MIL/STD	N/A

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com