


## G3PO(SMPS) Female to G3PO(SMPS) Female Straight Precision Adapter | DC-40GHz

P/N: FR1-G3PO-KKL

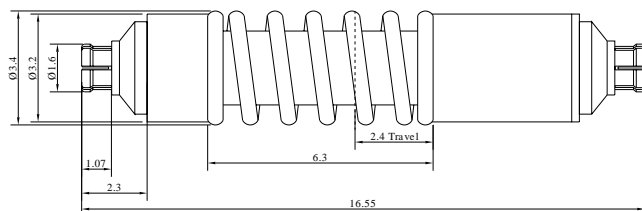

G3PO FEMALE

G3PO FEMALE

Dimensions are in mm



### Product Configuration

	Connector 1	Connector 2
Connector Series	G3PO(SMPS)	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Body Style	Straight	Straight
Connector Body Material	Beryllium Copper	Beryllium Copper
Connector Body Plating	Gold	Gold
Mount Method		None

### Electrical Specifications

Frequency	DC - 40GHz
VSWR / Return Loss	1.5
Insertion Loss	0.8

### Mechanical Data

Min. Mating Cycles	≥500
--------------------	------

### Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A