


**2.92mm Female with 2 Hole Flange to G3PO (SMPS) Female Cable P/N: FR701-292FF1G3PF-XXX**  
**Using .047" Series Semi-flexible Coax, DC - 40GHz**

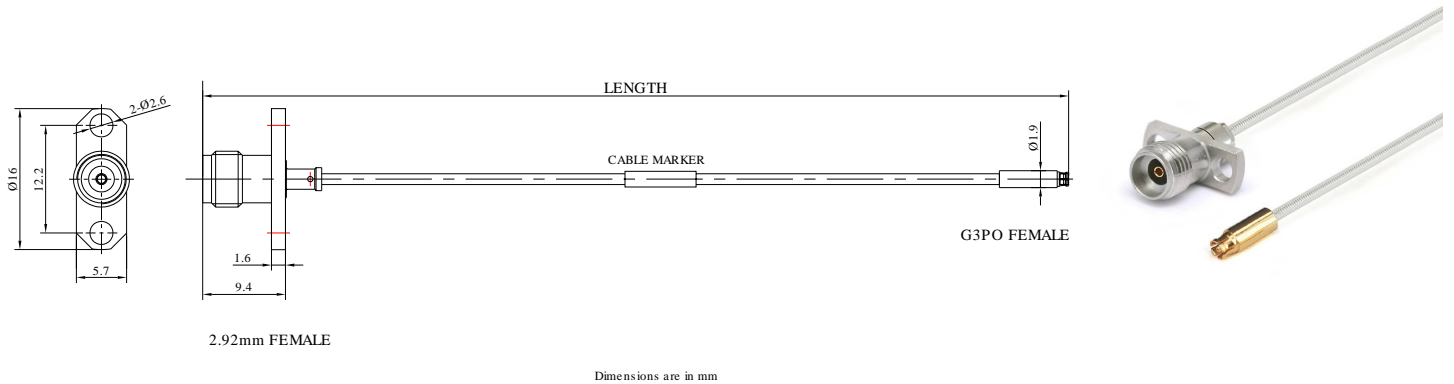

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	2 Hole Flange	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

2.92mm Female with 2 Hole Flange to G3PO (SMPS) Female Cable [P/N: FR701-292FF1G3PF-XXX](#)  
Using .047" Series Semi-flexible Coax, DC - 40GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A