


**2.92mm Female to G3PO (SMPS) Female Cable Using .047" Series P/N: FR701-292FG3PF-XXX**  
**Semi-flexible Coax, DC - 40GHz**

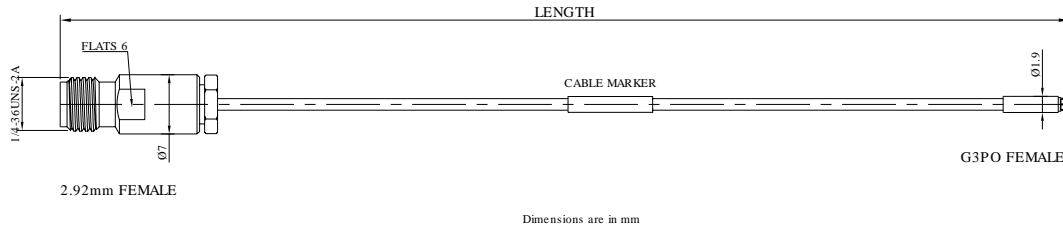

## Connectors Configuration

|                           | Connector 1     | Connector 2      |
|---------------------------|-----------------|------------------|
| Connector Series          | 2.92mm          | G3PO(SMPS)       |
| Connector Polarity        | Standard        | Standard         |
| Connector Gender          | Female          | Female           |
| Connector Impedance (Ohm) | 50              | 50               |
| Connector Mount Method    | None            | None             |
| Connector Body Style      | Straight        | Straight         |
| Connector Body Material   | Stainless Steel | Beryllium Copper |
| Connector Body Plating    | Passivated      | Gold             |

2.92mm Female to G3PO (SMPS) Female Cable Using .047" Series P/N: FR701-292FG3PF-XXX  
Semi-flexible Coax, DC - 40GHz

## Electrical Data

## Environmental Specifications

|                             |                  |
|-----------------------------|------------------|
| RoHS Compliant              | Yes              |
| Operating Temperature Range | -40 °C to +80 °C |
| MIL/STD                     | N/A              |