
Datasheet

P/N: GA702-G3PFG3PF-XXX

G3PO(SMPS) Female to G3PO(SMPS) Female Cable Assembly | .047" Series Semi-Flexible Coax Cable with FEP Jacket | DC - 100GHz



Dimensions are in mm

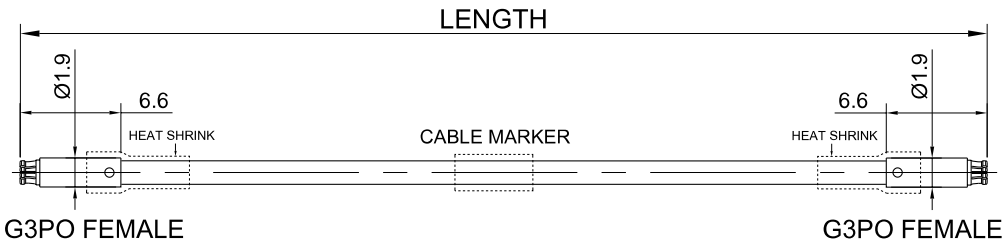

Connectors Configuration

	Connector 1	Connector 2
Connector Series	G3PO(SMPS)	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Beryllium Copper	Beryllium Copper
Connector Body Plating	Gold	Gold

Cable Configuration

Cable Type	.047" semi-flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Number of Shields	1
Shield Layer 1 Material	Tin-soaked copper
Jacket Material	FEP
Cable Diameter (mm)	1.63
Cable Color	Blue
Minimum Bend Radius (mm)	7.63mm
Capacitance (pF/m)	95.1
Velocity of Propagation	70%
Shielding Effectiveness	>90

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GA702-G3PFG3PF-XXX

G3PO(SMPS) Female to G3PO(SMPS) Female Cable Assembly | .047" Series Semi-Flexible Coax Cable with FEP Jacket | DC - 100GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 100GHz	8dB to 100GHz	1.62 to 40GHz
200	±3			2.44 to 40GHz
300	±5			3.56 to 40GHz
500	±5			5.82 to 40GHz
1000	±10			9.92 to 40GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45°C to +125°C