
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GA710-185MGPPF-XXX

1.85mm Male to GPPO(Mini-SMP) Female Cable Assembly | 086" Semi-Rigid Coax Cable t | DC - 65GHz

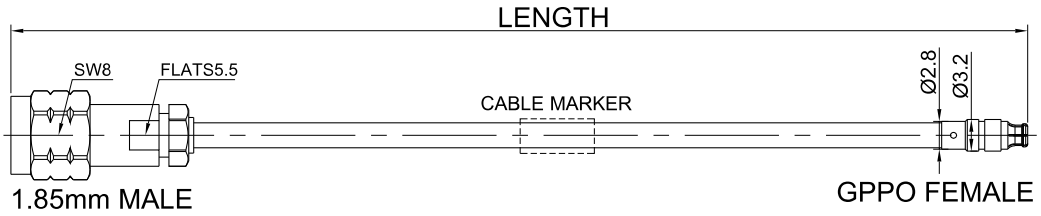

Dimensions are in mm



Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-rigid Cable (Copper)
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Shield Layer 1 Material	Copper
Cable Diameter (mm)	2.2
Cable Color	Cooper
Minimum Bend Radius (mm)	6mm
Capacitance (pF/m)	95
Velocity of Propagation	70%
Shielding Effectiveness	<-120dB @ 1GHz

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GA710-185MGPPF-XXX

1.85mm Male to GPPO(Mini-SMP) Female Cable Assembly | 086" Semi-Rigid Coax Cable t | DC - 65GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 65GHz	12dB	1.70
150	±3			2.20
200	±3			2.70
250	±3			3.20
300	±5			3.70
400	±5			4.70
500	±5			5.70

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45 ºC to +85 ºC