


**2.92mm Female to G3PO (SMPS) Female Cable Using .086" Semi-rigid Coax, DC - 40GHz**    P/N: **FR710-292FG3PF-XXX**

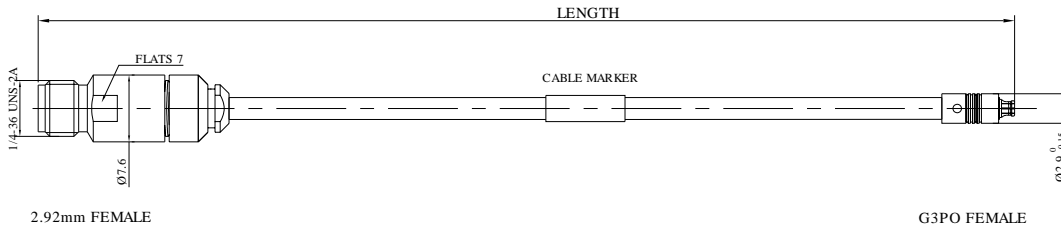

Dimensions are in mm

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

2.92mm Female to G3PO (SMPS) Female Cable Using .086" Semi-rigid Coax, DC - 40GHz **P/N: FR710-292FG3PF-XXX**

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A