
Datasheet

P/N: GA710-GPPFGPPWF-XXX

GPPO (mini-SMP) Female to GPPO (mini-SMP) Right Angle Female Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 40GHz



Dimensions are in mm

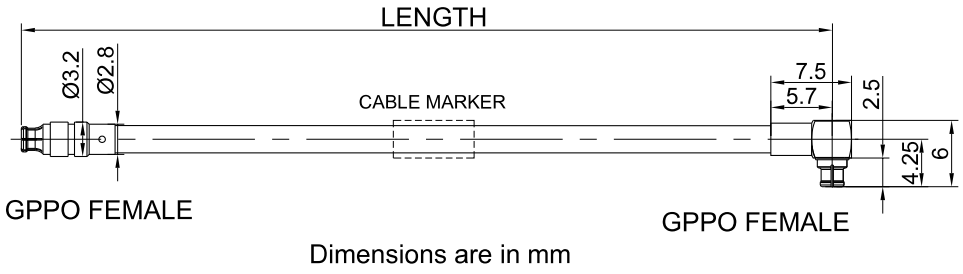


Connectors Configuration

	Connector 1	Connector 2
Connector Series	GPPO(Mini-SMP)	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50.0	50.0
Connector Body Style	Straight	Right Angle
Connector Body Material	CuBe	CuBe
Connector Body Plating	Gold	Gold

Cable Configuration

Cable Type	.086" Semi-rigid Cable (Copper)
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Shield Layer 1 Material	Copper
Cable Diameter (mm)	2.2
Cable Color	Cooper
Minimum Bend Radius (mm)	6mm
Capacitance (pF/m)	95
Velocity of Propagation	70%
Shielding Effectiveness	<-120dB @ 1GHz

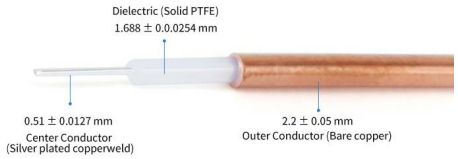

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GA710-GPPFGPPWF-XXX

GPPO (mini-SMP) Female to GPPO (mini-SMP) Right Angle Female Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 40GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40 GHz	10dB	1.32
150	±3			1.63
200	±3			1.94
250	±3			2.25
300	±5			2.56
400	±5			3.21
500	±5			3.82

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45 ºC to +85 ºC